

ULTIMA Slitting Machine



Robust & Versatile, the Wise Choice Slitter




www.dahbah.com.tw

DAH BAH
QUALITY • PROFESSIONAL • INNOVATION

Slitting Machine

Robust & Versatile, the Wise Choice Slitter

■ ULTIMA Series

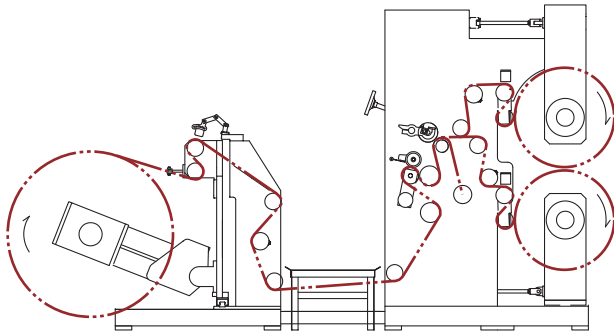

Features :

Materials

- LLDPE or HDPE 40-150 μ ; PE, OPP, CPP or PVC 30-150 μ ; PET 12-150 μ ; BOPP 25-150 μ ; Metalised film 20-70 μ ; Laminated films 40-200 μ ; Paper 60-210gsm.

Unwinding Section

- Unwinding-stand with shaftless hydraulic loading clamps.
- Equipped with digital type line position control (LPC) to ensure accurate slitting position.

Specification :

Model No.	SLF-MB130L
Min. & Max. Parent Web Width	650 ~ 1300 mm
Max. Parent Web Diameter	1000 mm
Unwind / Rewind Core I.D.	3" or 6"
Max. Rewind Diameter	600 mm
Min. & Max. Slit Width	50 ~ 650 mm (Depends on various materials' conditions)
Max. Machine Speed	400 M / min.

Slitting Section

- Equipped with razor cutter.
- Equipped with blower, expulsion tube.

Rewinding Section

- Horizontal moveable rewinding stand.
- Static eliminating device.
- Pneumatic control for lay-on roller provides steadier rewinding tension.

- Rewind stand with open arm system makes unloading easier.
- Equipped with ball type friction rings, which not only can raise the concentricity of the paper cores and finish rolls, but also can make unloading easier without causing paper dust.
- Individual tension detectors for two rewinding sections provide accurate and steady tension control.
- Equipped with taper tension control, providing superior rewind-tension for thin films whose thickness are under 15 μ .



DAH BAH
QUALITY • PROFESSIONAL • INNOVATION

Add. No. 69-10, Sec. 2, Chung Shin Rd., Tali Dist., Taichung City 412, Taiwan

Tel. +886-4-2483-2477 Fax. +886-4-2483-0852

E-Mail. dahbah@dahbah.com.tw website. www.dahbah.com.tw

* The working speed depends on the material condition and slitting width.

* Due to machine development, above information may change without notice.