

# ULTIMA Slitting Machine



Robust & Versatile, the Wise Choice Slitter




[www.dahbah.com.tw](http://www.dahbah.com.tw)

**DAH BAH**  
QUALITY • PROFESSIONAL • INNOVATION

# Slitting Machine

Robust & Versatile, the Wise Choice Slitter

## ■ ULTIMA Series

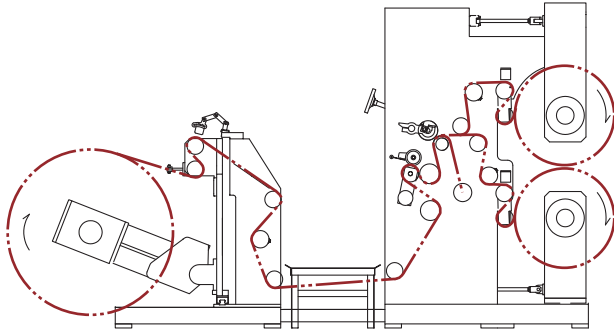

### Features :

#### Materials

- LLDPE or HDPE 40-150 $\mu$ ; PE, OPP, CPP or PVC 30-150 $\mu$ ; PET 12-150 $\mu$ ; BOPP 25-150 $\mu$ ; Metalised film 20-70 $\mu$ ; Laminated films 40-200 $\mu$ ; Paper 60-210gsm.

#### Unwinding Section

- Unwinding-stand with shaftless hydraulic loading clamps.
- Equipped with digital type line position control (LPC) to ensure accurate slitting position.

### Specification :

| Model No.                    | SLF-MB130L   |
|------------------------------|--|
| Min. & Max. Parent Web Width | 650 ~ 1300 mm  |
| Max. Parent Web Diameter     | 1000 mm  |
| Unwind / Rewind Core I.D.    | 3" or 6"   |
| Max. Rewind Diameter         | 600 mm   |
| Min. & Max. Slit Width       | 50 ~ 650 mm (Depends on various materials' conditions) |
| Max. Machine Speed           | 400 M / min.   |

#### Slitting Section

- Equipped with razor cutter.
- Equipped with blower, expulsion tube.

#### Rewinding Section

- Horizontal moveable rewinding stand.
- Static eliminating device.
- Pneumatic control for lay-on roller provides steadier rewinding tension.

- Rewind stand with open arm system makes unloading easier.
- Equipped with ball type friction rings, which not only can raise the concentricity of the paper cores and finish rolls, but also can make unloading easier without causing paper dust.
- Individual tension detectors for two rewinding sections provide accurate and steady tension control.
- Equipped with taper tension control, providing superior rewind-tension for thin films whose thickness are under 15 $\mu$ .



**DAH BAH**  
QUALITY • PROFESSIONAL • INNOVATION

Add. No. 69-10, Sec. 2, Chung Shin Rd., Tali Dist., Taichung City 412, Taiwan

Tel. +886-4-2483-2477 Fax. +886-4-2483-0852

E-Mail. [dahbah@dahbah.com.tw](mailto:dahbah@dahbah.com.tw) website. [www.dahbah.com.tw](http://www.dahbah.com.tw)

\* The working speed depends on the material condition and slitting width.

\* Due to machine development, above information may change without notice.