

SUPRA **Slitting Machine**

Shaftless Type, Multi-Winding-Stands, High Speed Slitting Machine




www.dahbah.com.tw

DAH BAH
QUALITY • PROFESSIONAL • INNOVATION

Slitting Machine

Professional & High Speed Operation

■ SUPRA Series

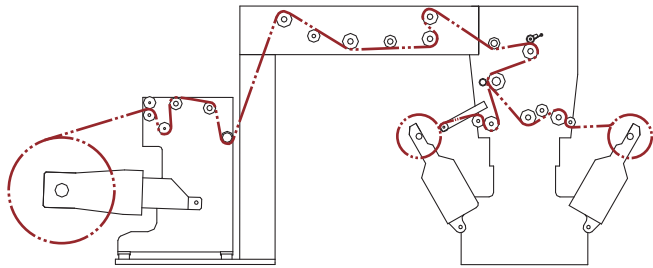

Features :

Materials

- PVC, OPP, PET, CPP, Shrinkable PP Film, Paper.
- Silicon Coated Paper, Metalized Paper, Self-adhesive Paper, Aluminum Foil + Paper, NCR Paper, Non-woven Cloth.
- Laminated films (Toothpaste Multi-layer packing Material and others.)

Rewinding Type

- Center rewinding with multi shaftless rewind stands.

Specification :

Model No.	SLF-MS260
Min. & Max. Parent Web Width	1300 ~ 2600 mm
Max. Parent Web Diameter	1000 mm
Unwind / Rewind Core I.D.	3" or 6"
Max. Rewind Diameter	1000 mm
Min. & Max. Slit Width	400 ~ 1300 mm (Depends on various materials' conditions)
Max. Machine Speed	600 M / min.

Unwinding Section

- Unwind-stand with shaftless hydraulic loading clamps. (Hydraulic up / down, left / right moving).
- Equipped with edge position control (EPC) to ensure accurate slitting position.
- Equipped with pneumatic brake as well as electro / pneumatic converter for wide range tension control.

Slitting Section

- Shear knife cutting or razor blade cutting in the air or groove

is available according to material characteristics.

- Equipped with blower and expulsion tube.

Rewinding Section

- Equipped with shaftless rewinding stands, heavy finishing rolls can be directly unload to the trolley. Easy for one-man operation.
- Static eliminating device equipped.
- Equipped with banana roller for film expanding.



DAH BAH
QUALITY • PROFESSIONAL • INNOVATION

Add. No. 69-10, Sec. 2, Chung Shin Rd., Tali Dist., Taichung City 412, Taiwan

Tel. +886-4-2483-2477 Fax. +886-4-2483-0852

E-Mail. dahbah@dahbah.com.tw website. www.dahbah.com.tw

* The working speed depends on the material condition and slitting width.

* Due to machine development, above information may change without notice.